
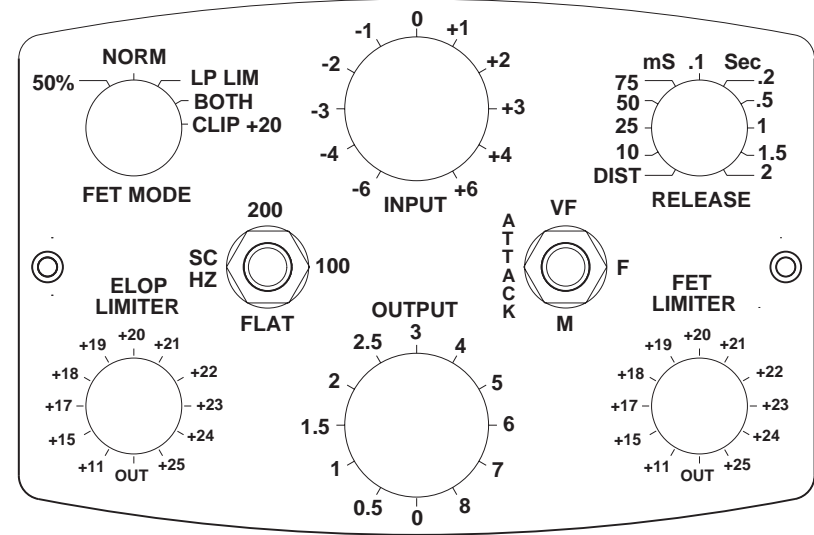


TEMPLATES FOR STORING MANLEY MASTERING SLAM! SETTINGS

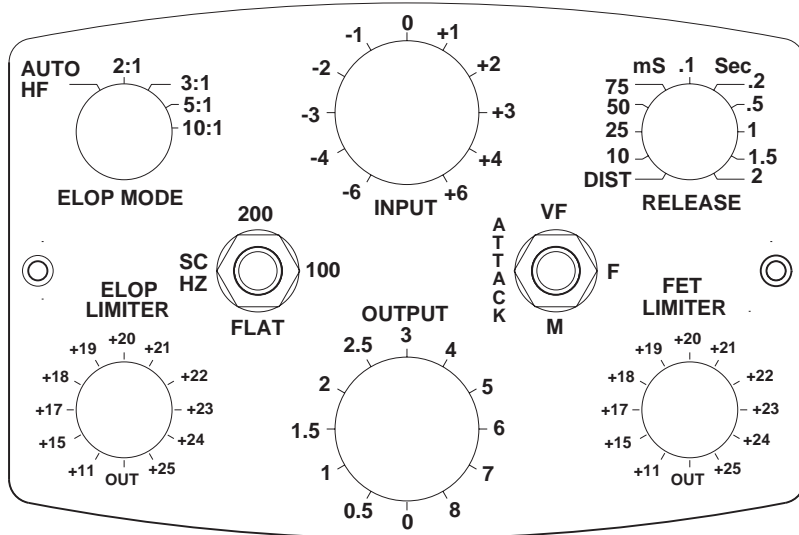

PATCHING

- Limit: IN
 OUT
- Input: Balanced XLR
 UNBalanced 1/4"
 DAC
 ADC via XLR OP
- Output: Balanced XLR
 Unbalanced 1/4"
 DAC Output
- Side Chain ELOP.....
 Side Chain FET.....

- Link: Stereo Link
 Dual Mono
 Both & Ext

ADC/DAC

- DAC Filter: 40K 80K/norm 20K
 ADC Filter: 40K 80K/norm 20K
 ADC Sample Rate: 44.1 48K
 88.2 96K
 AES WC
 ADC Word Length: 24 20 16
 Dither: ON
 Noise Shape: ON

- LED METER MODE.....
 LED METER DEFLECTION
- VU METER MODE.....
 VU METER ATTEN
- VU METER DEFLECTION
- LINK 1
- LINK 2
- Side Chain ELOP.....
 Side Chain FET.....

| | | |
|---------|----------|-----------------|
| PROJECT | ENGINEER | CHANNEL 1 TRACK |
| SONG | DATE | CHANNEL 2 TRACK |
| NOTES | | |